


FIBERGLASS FAN (WITH OR WITHOUT CONE)

Through the aerodynamics design of the new MULTIFAN Fiberglass Fan line, Vostermans Ventilation can offer the market a fiberglass fan line, which sets a new ventilation standard focusing on the three most important fan parameters: air performance, fan efficiency and air flow ratio.

Tunnel or length ventilated livestock buildings and greenhouses demand through higher product performances also higher quantities of air. With durability and reliability as an asset, the Multifan Fiberglass Fan line guarantees fresh air at low cost.

BELT DRIVE FANS ARE SINGLE SPEED ONLY

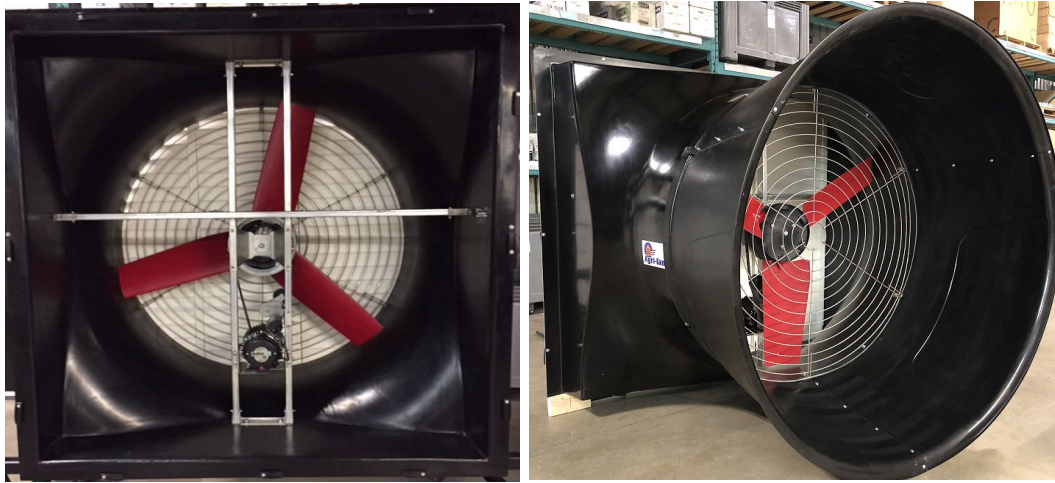

54" BLACK FAN AVAILABLE WITH OR WITHOUT ABS CONE

DIA.	MODEL	PART#	COLOUR	CFM @ 0.05" S.P.		VOLT	AMPS	R.S.O. W" X H"
				w/o Cone	** w/Cone			
** BESS LAB TEST 19503 CFM/W 0"S.P. 22.7								
54"	54CFB	E52-9275QNC	BLACK	25,800	**29,100	240	5.7	64" X 64"
54"	54CFB	E52-9375QNC	BLACK	25,800	29,100	240/460	4.4/2.6	64" X 64"
54"	-	E52-9015	BLACK	3PC DISCHARGE ABS CONE (26" DEEP)				
OPTIONAL								
54"		E52-9023	1PC "POLY" CONE					
54" WHITE FAN AVAILABLE WITH POLYETHYLENE CONE ONLY								
54"	54CFW(1)	E52-9274Q	WHITE	-	** 31100	240	6.8	64" X 64"
** BESS LAB TEST 18141								

PARTS

PART #	DESCRIPTION
E52-6530QHDPWH	54" INSULATED COVER WHITE FAN INSIDE DIM. 62-1/4" SQ.
E52-6530QHDPBL	54" INSULATED COVER BLACK FAN INSIDE DIM. 62-3/8" SQ.
E50-1263	MOTOR FM0381 1 PHASE (PRIOR TO JULY 2018)/AFTER FEB 2020
E50-1266	MOTOR FM0469 1 PHASE (JULY 2018 - FEB 2020)
E50-1265	MOTOR FM0336 3 PHASE (USED IN E52-9375QNC)
E50-1256-3	MOTOR FM0384 3 PHASE (USED IN E52-9374Q) (PRIOR TO AUG 2022)
E50-1273-3	MOTOR FM0534 3 PHASE (USED IN E52-9374Q) (AS OF AUG 2022)
E52-6160	SHUTTER BAR (2 PER FAN RECOMMENDED)
E50-0550Q	BELT 54" FAN (VSNAARF)
E50-0398	SPA89 MOTOR PULLEY (10NR/12BR)
E50-0551Q	SET OF 3 IMPELLER FINS (10NR)
E50-0539Q	SETBEVARM007A HUB AND PULLEY FOR 10NR FIN/1 BOLT
E50-0553Q	ZA177 FASTENER SET & HDWE (10NR)
E50-0552Q	SET OF 3 IMPELLER FINS (12BR)
E50-0554Q	HUB & PULLEY (12BR)