Permanent Magnet Direct Drive 50", 55", & 60" Panel Fans

Save Time & Money

- No Belts to Change
- No Pulleys to Maintain
- No Lubricating
 - Motor
 - Bearings
 - Gearbox
- No additional moving parts other than the motor for <u>zero maintenance</u>



Motor -


- Totally enclosed
 IP65 rated
- High efficiency
- Produces and emits less heat - cool to the touch
- Quiet

Internal Motor Drive -

- Provides soft starts
- Allows for precise and uniform speed control
- Enables variable speed (requires separate variable speed control to adjust fan speed)

Power -

- Increases efficiency when run at low speeds
- Supplies constant torque to the propeller

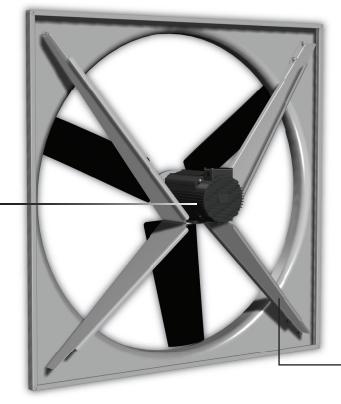

Prop

- Shown
 - 3 blade poly
 - Cast aluminum hub
- Coming Soon
 - 5 blade poly

3 Year Warranty on ENTIRE fan

Heavy-Duty X-Frame

- 10-gauge, G90 galvanized
- Superior strength and rigidity to minimize vibration

▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.



Thrust CFM/

Watt Drive Prop

Thrust CFM

Permanent Magnet Direct Drive 50", 55", & 60" Panel Fans

Part#

Features

- Ships fully assembled and ready for installation
- Wide assortment of optional mounting brackets for wood and steel posts for precise airflow
- Maximize your cooling capabilities by adding a stainless steel,
 12-nozzle, high pressure fog ring kit
- Totally enclosed, maintenance-free, high-efficiency motor has completely sealed ball bearings, UL and CUL recognized

Spd

Size Ph

Three Phase wired for 190-240V

Installation Options

Part#	Description						
Swivel Offset Post Mounting Bracket							
VRSBRPR6PX-PM	4"-6" Wood Post, Galvanized						
Swivel Offset Column Mounting Brackets							
VRSBRPR3X	3" Round Column, Galvanized						
VRSBRPR35X	3½" Round Column, Galvanized						
VRSBRPR4X	4" Round Column, Galvanized						
VRSBRPR55X	5½" Round Column, Galvanized						
VRSBRSQ6X	6" Square Column, Painted						
In-line Column	In-line Column Mounting Brackets						
VRSBRP3	3"-3½" Round Column, Black Powder Coat & Galv.						
VRSBRP4	4"-4½" Round Column, Black Powder Coat & Galv.						
VRSBRP4SQ	4"-4½" Square Column, Black Powder Coat & Galv.						
VRSBRP5	5"-5½" Round Column, Black Powder Coat & Galv.						
VRSBRP6	6"-6½" Round Column, Black Powder Coat & Galv.						
Chain Suspendi	ng Kit						
HK211	(3) 72" of Chain, w/Fan to Chain Assembly Hardware						

Part#	Size	Ph	Spd	Thrust CFM	. ,	Drive	Prop
Single Phase							
VPX50P3PM221A	50"	1	1/Var^	100% 29,500	14.2	PM-D	3-Ply
				90% 25,142	15.6		
				80% 22,569	19.4		
				70% 19,759	25.0		
				60% 17,033	34.0		
				50% 14,172			
VPX55P3PM221A	55"	1	1/Var^	100% 37,300		PM-D	3-Ply
				90% 29,475			
				80% 26,269			
				70% 23,483	28.3		
				60% 19,932			
				50% 16,814			
VPX60P3PM221A	60"	1	1/Var^	100% 40,500		PM-D	3-Ply
				90% 36,700			
				80% 32,400	29.5		
				70% 28,400	37.7		
				60% 21,650	45.2		
				50% 17,886	61.4		

VPX50P3PM223B	50"	3	1/Var^	100% 29,300	14.0	PM-D	3-Ply
				90% 24,831	15.2		
				80% 21,775	19.6		
				70% 19,229	26.0		
				60% 16,564	34.8		
				50% 13,929	48.5		
VPX55P3PM223B	55"	3	1/Var^	100% 37,500	12.6	PM-D	3-Ply
				90% 29,391	17.3		
				80% 26,091	21.9		
				70% 23,047	28.6		
				60% 19,947	38.4		
				50% 16,570	53.2		
VPX60P3PM223B	60"	3	1/Var^	100% 40,300	17.8	PM-D	3-Ply
				90% 32,667	19.9		
				80% 29,036			
				70% 25,532	32.9		
				60% 21,970			
				50% 18,725	63.2		
Three Phase wire		380					
VPX50P3PM223C	50"	3	1/Var^	100% 29,600	14.3	PM-D	3-Ply
				90% 24,818	15.3		
				80% 22,101	19.4		
				70% 19,369	25.2		
				60% 16,573	33.5		
				50% 14,067	46.3		
VPX55P3PM223C	55"	3	1/Var^	100% 36,800	13.3	PM-D	3-Ply
				90% 28,971	18.1		
				80% 25,806	22.9		
				70% 22,723	29.4		
				60% 19,628	39.9		
				50% 16,488	55.5		
VPX60P3PM223C	60"	3	1/Var^	100% 40,100	17.4	PM-D	3-Ply
VPX60P3PM223C	60"	3	1/Var^	100% 40,100 90% 32,455	17.4 19.5	PM-D	3-Ply
VPX60P3PM223C	60"	3	1/Var^	100% 40,100 90% 32,455 80% 28,620	17.4 19.5 24.8	PM-D	3-Ply
VPX60P3PM223C	60"	3	1/Var^	100% 40,100 90% 32,455 80% 28,620 70% 25,320	17.4 19.5 24.8 32.0	PM-D	3-Ply
VPX60P3PM223C	60"	3	1/Var^	100% 40,100 90% 32,455 80% 28,620	17.4 19.5 24.8	PM-D	3-Ply

^ Variable speed fans require separate variable speed control to adjust fan speed

Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 230-12

OSHA requires these fans to be mounted a minimum of 7' above the floor

▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.